



# KeyBank State Technical Specifications

**Stage Door:** 1650 Chester Ave, Cleveland, OH 44114 - **24 Hr. Receiving Address (Central Security):** 1650 Chester Ave, Cleveland OH 44114

## Stage Specifications:

**Seating Capacity:** (3,158) Max - (3,086) w/ Orchestra Pit Seated

**Proscenium opening:** (51'-5" w X 28'-3" h)

**Main Grid Height:** (81'-0")

**Short Grid Height:** (60'-8")

### Apron Lip to:

- (5'-0") to Plaster Line
- (7'-10") to House Curtain
- (8'-4") to Line Set #1
- (63'-4") to Last Line Set #42
- (69'-0") to Upstage Wall

### Plaster Line to:

- Last Line Set #82: (55'-0")
- Up Stage Wall: (66'-5")
- Bussel Wall: (96'-3")
- Balcony Rail: (54'-6")
- Box Boom #1: (7'-6") & Box Boom #2: (21'-6")
- Perch Lighting Positions: (45'-8")
- Booth: (145'-0")
- Last row of seats Orchestra level: - (125'-0")
- Last row of seats Balcony level: - (143'-0")

**Number of Battens:** 82 (Single Purchase Counterweight unless noted)

**Length of Battens:** (62'-0")

**Baten Extensions:** (4'-0")

**Number of spot Sheaves:** 75

**Distance between Battens:** (0'-8")

**Travel of Battens:** (79'-0")

**Last Lineset (#82) to Up Stage Wall:** (8'-3")

### Weight Capacity:

- Line Set #1 & 2 (2,280lbs) - Double Purchase
- Line Set #3 - 82 (1,500lbs)

**Lighting Ladder Track (SR & SL):** (20'-7")

**Loading Dock Doors:** (3) Total

- East & West Doors: (7'6" w X 9'-0" h)
- Center Door: (9'0" w X 9'-3" h)
- (4) 50amp circuits are available at the Loading Dock

**Freight Elevator:** (8'-0" w X 16'-4" d X 7'-11" h) - 12,000lbs capacity

## Stage Specifications:

**Stage Right Wing:** (52'-9") from Center Line

**Center Line to Stage Right Wall:** (60'-0")

**Stage Left Wing:** (49'-9") from Center Line

**Center Line to Stage Left Fly Rail:** (55'-0")

### Stage Deck to:

- Bottom of Valance: - (23'-8")
- Lowest Catwalk: SR - (35'-0") / SL - (50'-0")
- Loading Bridge Pin Rail: (SR): (35'-0")
- Audience Floor: (-3'-4")
- Orchestra Floor: (-10'-0")
- Balcony Rail: (11'-0")

**Orchestra Pit:** (49'-0" w X 27'-0" d)

-Max number of musicians is 80 with stands & instruments

## House Soft Goods:

**Legs:** - 14 @ (15'-0" w X 40'-0" h)

**Borders:** - 7 @ (63'-0" w X 15'-0" h)

### Drops:

- 1- Black & 1- White Scrim @ (63'-0" w X 30'-0" h)
- 1- black/2-panel @ (63'-0" w X 30'-0" h) - (31'-6" ea.)
- 2 Blackout @ (63'-0" w X 30'-0" h)
- 1 Cyclorama @ (63'-0" w X 30'-0" h) - natural muslin

## PDF Drawings are available at:

<https://www.playhousesquare.org/about-playhousesquare-main/rent-our-spaces/stage-and-theatrical-specs>

## Playhouse Square Production Department Contact List:

**Director of Production:** Penny Zaletel (216) 640-8546  
([Penny.Zaletel@playhousesquare.org](mailto:Penny.Zaletel@playhousesquare.org))

**Sr. Production Manager:** Jody Dagg (216) 640-8548  
([Jody.Dagg@playhousesquare.org](mailto:Jody.Dagg@playhousesquare.org))

**Production Manager:** Tony Hanf (216) 640-8670  
([Tony.Hanf@playhousesquare.org](mailto:Tony.Hanf@playhousesquare.org))

**Technical Project Manager:** Liam Roth (216) 329-0344  
([Liam.Roth@playhousesquare.org](mailto:Liam.Roth@playhousesquare.org))

**Production Manager:** Heather Cochran (216) 373-135  
([Heather.Cochran@playhousesquare.org](mailto:Heather.Cochran@playhousesquare.org))

**Production Supervisor:** Daniel Zilka (216) 373-3711  
([Daniel.Zilka@playhousesquare.org](mailto:Daniel.Zilka@playhousesquare.org))



# KeyBank State Technical Specifications

**Stage Door:** 1650 Chester Ave, Cleveland OH 44114- **24 Hr. Receiving Address (Central Security):** 1650 Chester Ave, Cleveland OH 44114

## House Audio:

### House Audio Console: DiGiCo SD10-24 Console

- 144 input channels, 64 Aux/Sub-Ground Busses, 24x24 Full Processing Matrix
- DiGiCo X-A-4REA4 128x48x8 (32 bit Input/Output Card)
- DiGiCo SD Rack 192kHz (32 bit Input/Output Card)

### Mixing Position: (125'-0") from Plaster Line

### Center Line Array: (1) Nexo 4x4 Mk2

- (7) Nexo Geo S805 speakers
- (1) Nexo Geo S830 speakers
- (3) Nexo CD12 Subwoofers

### House Right Towers: (2) Nexo 4x4 Mk2

- (9) Nexo Geo S805 speakers
- (1) Nexo Geo S830 speakers
- (4) Nexo CD12 Subwoofers

### House Left Towers : (2) Nexo 4x4 Mk2

- (9) Nexo Geo S805 speakers
- (1) Nexo Geo S830 speakers
- (4) Nexo CD12 Subwoofers

### Front Fills: (1) Yamaha PX3

- (4) EAW JF60MT speakers

### Under Balcony: (6) Nexo PS8 amps

- (16) Nexo PS8 speakers

### Balcony Left: (2) Camco Vortex 6 amps

- (7) Nexo Geo S805 speakers
- (1) Nexo Geo S830 speakers
- (3) Nexo CD12 Subwoofers

### Balcony Right: (2) Camco Vortex 6 amps

- (7) Nexo Geo S805 speakers
- (1) Nexo Geo S830 speakers
- (3) Nexo CD12 Subwoofers

### Under Boxes: (1) RANC MA3 & (1) Nexo PS8 amps

- (6) JBL Control 25 speakers
- (5) Nexo PS8 speakers

### Monitors: (3) Crest CA-9 amps

- (8) EAW LA212 Speakers

### 4-Channel Clear-Com Stage & Paging System

### (1) - 9ft Steinway Black 483055D M0215 Piano

## Microphone Inventory:

6	AKG 535	1	Barcus Piano Pick-Up	7	Sennheiser 421
5	Shure SM58	2	AKG c568 EB Shotguns	8	Sennheiser 441
18	Shure SM57	3	Crown CM31	2	Beyer Mc5 LAV
1	Shure PG 81	2	Audio Technica P2M AT8531	3	Audio Technica U859QL
2	AKG 414	2	Shure QLXD4 - Beta 58	6	Countryman DI
4	AKG D330 BT	2	Sennheiser EW100 w/c	2	Radial PCDI

## Risers Inventory:

### Wenger: (Folding legs & Interlocking):

- (2) 4'-0" X 8'-0" @ 8"h
- (16) 4'-0" X 8'-0" @ 16"h

### StageRight: (14) 4'-0" X 8'-0" total lids

- (12) 32" to 54" adjustable legs & (6) 24" rolling legs

## House Lighting Equipment:

Theatre is contracted with House Plot unless noted, contact Director of Production for details.

### Spotlights: (4) Lycian 1295 ELT, 3Kw

### Inventory:

- (40) - Strand Cantata LED FC
- (6) - VARI-LITE VL2600 Profile
- (20) - 10° ETC Source Four LED Series Lustr 2
- (20) - Strand SL 36, 36° ellipsoidal
- (70) - Strand SL 26, 26° ellipsoidal
- (20) - Strand SL 19, 19° ellipsoidal
- (20) - Strand SL 10, 10° ellipsoidal
- (20) - Altman PAR64 MFL
- (8) - Chroma-Q Color Force II 72 (Upon Request)
- (10) Ladders - (5) Per side
- (10) Booms - (5) Per side

### Lighting Control: ETC Ion Console

- Lighting control is DMX-over-ethernet protocols (sACN)

### Dimmers: (468) 2.4kw & (21) 6kw

### Road Power Services: (All Three-Phase)

- Stage Left - (2) 200amp
- Stage Right - (4) 400amp 5-wire and camlocks

# KeyBank State Technical Specifications

## Lineset Schedule & Notes

<u>LINESET #</u>	<u>POSITION</u>	<u>DESCRIPTION</u>	<u>NOTES</u>
		<b>PLASTER LINE</b>	
	9"	<b>FIRE CURTAIN</b> (upstage edge of smoke pocket)	
	2'-10"	<b>HOUSE CURTAIN</b>	
1	3'4"	BLACK VELOUR BORDER	Double purchase
2	3'10"	BLACK VELOUR LEGS	Double purchase
3	5'-1"		Main grid 81' ht., begin single purchase ☐
4	5'-9"	ELECTRIC #1	
5	6'5"		
6	7'-0"		
7	7'-9"		
8	8'-6"		
9	9'-0"		
10	9'-6"	BLACK VELOUR BORDER	
11	9'-10"	BLACK VELOUR LEGS	
12	10'-6"		
13	11'-2"		
14	11'-10"		
15	12'-6"		
16	13'-2"		
17	13'-10"		
18	14'-6"		
19	15'-2"	BLACK VELOUR BORDER	
20	15'-10"	BLACK VELOUR LEGS	
21	16'-6"		
22	17'-2"		
23	17'-10"	ELECTRIC #2	
24	18'-6"		
25	19'-2"		
26	19'-10"		

# KeyBank State Technical Specifications

## Lineset Schedule & Notes

<u>LINESSET #</u>	<u>POSITION</u>	<u>DESCRIPTION</u>	<u>NOTES</u>
27	20'-6"		
28	21'-2"		
29	21'-10"	BLACK VELOUR BORDER	
30	22'-6"	BLACK VELOUR LEGS	
31	23'-2"		
32	24'-5"		
33	25'-1"		
34	25'-9"	BLACKOUT w/ fullness	
35	26'-5"		
36	27'-1"		
37	27'-9"	BLACK VELOUR BORDER	
38	28'-5"	BLACK VELOUR LEGS	
39	29'-1"		
40	29'-9"	ELECTRIC #3	
41	30'-5"		
42	31'-1"		
43	31'-9"		
44	32'-5"		
45	33'-1"		
46	33'-9"		
47	34'-5"		
48	35'-1"	BLACK VELOUR BORDER	
49	35'-9"	BLACK VELOUR LEGS	
50	36'-5"		
51	37'-1"		
52	37'-9"		
53	38'-5"	ELECTRIC #4	Cyc Lights Upon Request
54	39'-1"		
55	39'-9"	BLACK VELOUR BORDER	
56	40'-5"	BLACK VELOUR LEGS	
57	41'-1"	CYC	Move as needed

# KeyBank State Technical Specifications

## Lineset Schedule & Notes


<u>LINESET #</u>	<u>POSITION</u>	<u>DESCRIPTION</u>	<u>NOTES</u>
58	41'-9"	ELECTRIC #5	
59	42'-5"		
60	43'-1"		
61	43'-9"		
62	45'-0"		
63	45'-8"		
64	46'-0"		
65	47'-0"		
66	47'-8"		
67	48'-4"		
68	49'-0"		
69	49'-8"		
70	50'-4"		
71	51'-0"		
72	51'-8"		
73	52'-4"		
74	53'-0"		
75	53'-8"	ELECTRIC #6	
76	54'-4"		
77	55'-0"		
78	55'-8"		
79	66'-4"		
80	57'-0"		
81	57'-8"		
82	58'-4"	BLACKOUT	Move as needed
83		SL LIGHTING LADDERS	
84		SR LIGHTING LADDERS	



# Playhouse Square®

## KeyBank State Technical Specifications

### Production Map

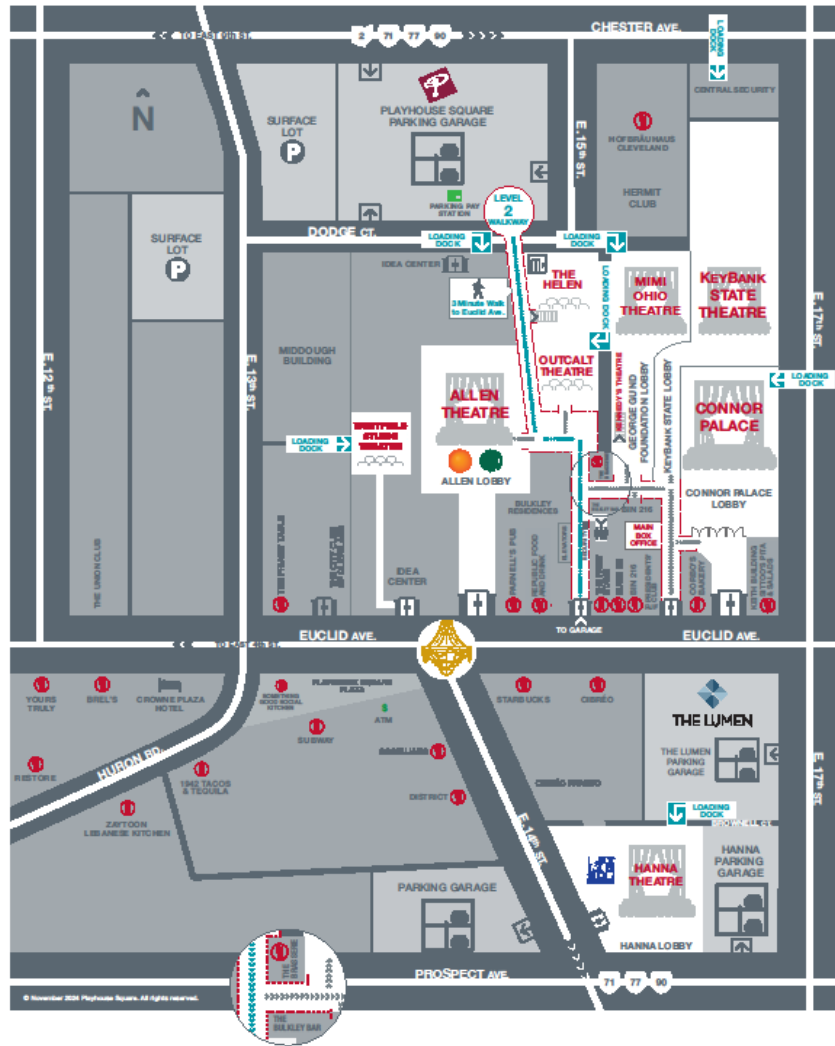



# KeyBank State Technical Specifications

Loading Dock Photo

